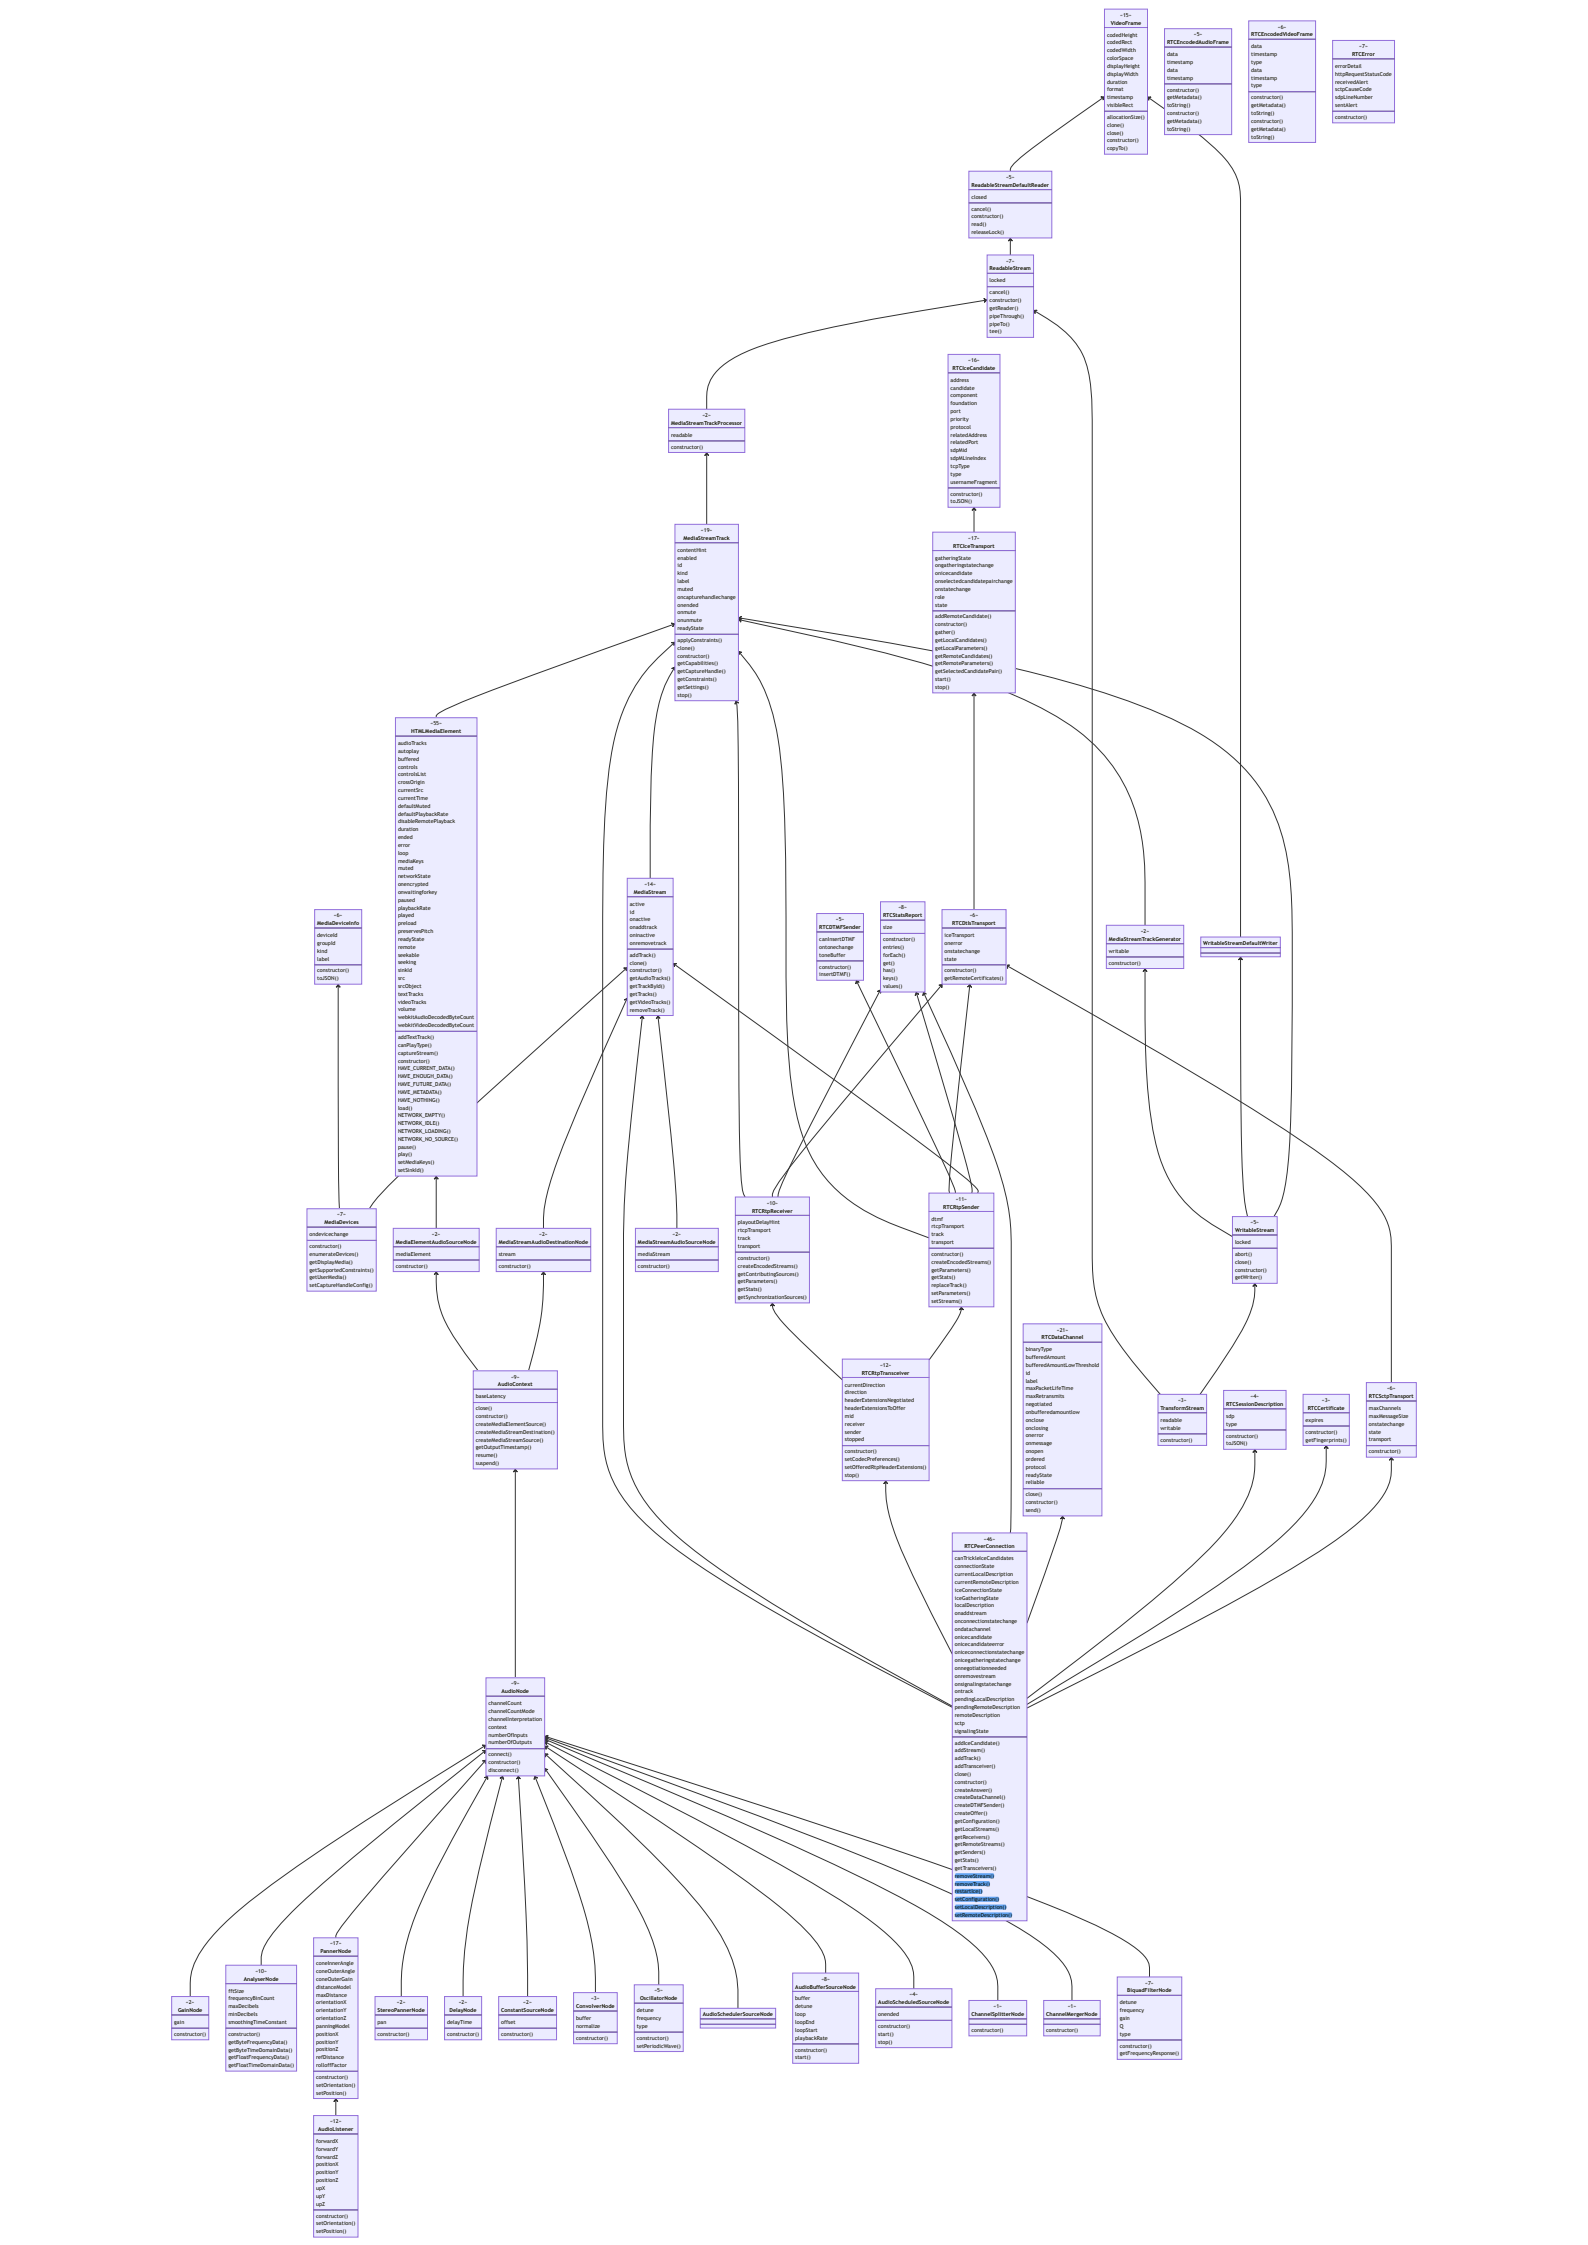
-15-
VideoFrame
codedHeight
codedRect
codedWidth
colorSpace
displayHeight
displayWidth
duration
format
timestamp
visibleRect
allocationSize()
clone()
close()
constructor()
copyTo()
-5-
RTCEncodedAudioFrame
data
timestamp
data
timestamp
constructor()
getMetadata()
toString()
constructor()
getMetadata()
toString()
-6-
RTCEncodedVideoFrame
data
timestamp
type
data
timestamp
type
constructor()
getMetadata()
toString()
constructor()
getMetadata()
toString()
-7-
RTCError
errorDetail
httpRequestStatusCode
receivedAlert
sctpCauseCode
sdpLineNumber
sentAlert
constructor()
-5-
ReadableStreamDefaultReader
closed
cancel()
constructor()
read()
releaseLock()
-7-
ReadableStream
locked
cancel()
constructor()
getReader()
pipeThrough()
pipeTo()
tee()
-16-
RTCIceCandidate
address
candidate
component
foundation
port
priority
protocol
relatedAddress
relatedPort
sdpMid
sdpMLineIndex
tcpType
type
usernameFragment
constructor()
toJSON()
-2-
MediaStreamTrackProcessor
readable
constructor()
-19-
MediaStreamTrack
contentHint
enabled
id
kind
label
muted
oncapturehandlechange
onended
onmute
onunmute
readyState
applyConstraints()
clone()
constructor()
getCapabilities()
getCaptureHandle()
getConstraints()
getSettings()
stop()
-17-
RTCIceTransport
gatheringState
ongatheringstatechange
onicecandidate
onselectedcandidatepairchange
onstatechange
role
state
addRemoteCandidate()
constructor()
gather()
getLocalCandidates()
getLocalParameters()
getRemoteCandidates()
getRemoteParameters()
getSelectedCandidatePair()
start()
stop()
-15-
HTMLMediaElement
audioTracks
autoplay
buffered
controls
controlsList
crossOrigin
currentSrc
currentTime
defaultMuted
defaultPlaybackRate
disableRemotePlayback
duration
ended
error
loop
mediaKeys
muted
networkState
onencrypted
onwaitingforkey
paused
playbackRate
played
preload
preservesPitch
readyState
remote
seekable
seeking
sinkId
src
srcObject
textTracks
videoTracks
volume
webkitAudioDecodedByteCount
webkitVideoDecodedByteCount
addTextTrack()
canPlayType()
captureStream()
constructor()
HAVE_CURRENT_DATA()
HAVE_ENOUGH_DATA()
HAVE_FUTURE_DATA()
HAVE_METADATA()
HAVE_NOTHING()
load()
NETWORK_EMPTY()
NETWORK_IDLE()
NETWORK_LOADING()
NETWORK_NO_SOURCE()
pause()
play()
setMediaKeys()
setSinkId()
-14-
MediaStream
active
id
onactive
oneaddtrack
oninactive
onremovetrack
addTrack()
clone()
constructor()
getAudioTracks()
getTrackById()
getTracks()
getVideoTracks()
removeTrack()
-5-
RTCDTMFSender
canInsertDTMF
ontonechange
toneBuffer
constructor()
insertDTMF()
-8-
RTCStatsReport
size
constructor()
entries()
forEach()
get()
has()
keys()
values()
-6-
RTCDtlsTransport
iceTransport
onerror
onstatechange
state
constructor()
getRemoteCertificates()
-2-
MediaStreamTrackGenerator
writable
constructor()
WritableStreamDefaultWriter
-6-
MediaDeviceInfo
deviceId
groupId
kind
label
constructor()
toJSON()
-7-
MediaDevices
ondevicechange
constructor()
enumerateDevices()
getDisplayMedia()
getSupportedConstraints()
getUserMedia()
setCaptureHandleConfig()
-2-
MediaElementAudioSourceNode
mediaElement
constructor()
-2-
MediaStreamAudioDestinationNode
stream
constructor()
-2-
MediaStreamAudioSourceNode
mediaStream
constructor()
-10-
RTCRtpReceiver
playoutDelayHint
rtcpTransport
track
transport
constructor()
createEncodedStreams()
getContributingSources()
getParameters()
getStats()
getSynchronizationSources()
-11-
RTCRtpSender
dtmf
rtcpTransport
track
transport
constructor()
createEncodedStreams()
getParameters()
getStats()
replaceTrack()
setParameters()
setStreams()
-5-
WritableStream
locked
abort()
close()
constructor()
getWriter()
-22-
RTCDataChannel
binaryType
bufferedAmount
bufferedAmountLowThreshold
id
label
maxPacketLifeTime
maxRetransmits
negotiated
onbufferedamountlow
onclose
onclosing
onerror
onmessage
onopen
ordered
protocol
readyState
reliable
close()
constructor()
send()
-12-
RTCRtpTransceiver
currentDirection
direction
headerExtensionsNegotiated
headerExtensionsToOffer
mid
receiver
sender
stopped
constructor()
setCodecPreferences()
setOfferedRtpHeaderExtensions()
stop()
-3-
TransformStream
readable
writable
constructor()
-4-
RTCSessionDescription
sdp
type
constructor()
toJSON()
-3-
RTCCertificate
expires
constructor()
getFingerprints()
-6-
RTCSctpTransport
maxChannels
maxMessageSize
onstatechange
state
transport
constructor()
-9-
AudioContext
baseLatency
close()
constructor()
createMediaElementSource()
createMediaStreamDestination()
createMediaStreamSource()
getOutputTimestamp()
resume()
suspend()
-46-
RTCPeerConnection
canTrickleIceCandidates
connectionState
currentLocalDescription
currentRemoteDescription
iceConnectionState
iceGatheringState
localDescription
onaddstream
oniceconnectionstatechange
ondatachannel
onicecandidate
onicecandidateerror
oniceconnectionstatechange
ongatheringstatechange
onnegotiationneeded
onremovestream
onsignalingstatechange
ontrack
pendingLocalDescription
pendingRemoteDescription
remoteDescription
sctp
signalingState
addIceCandidate()
addStream()
addTrack()
addTransceiver()
close()
constructor()
createAnswer()
createDataChannel()
createDTMFSender()
createOffer()
getConfiguration()
getLocalStreams()
getReceivers()
getRemoteStreams()
getSenders()
getStats()
getTransceivers()
removeStream()
removeTrack()
restartIce()
setConfiguration()
setLocalDescription()
setRemoteDescription()
-9-
AudioNode
channelCount
channelCountMode
channelInterpretation
context
numberOfInputs
numberOfOutputs
connect()
constructor()
disconnect()
-2-
GainNode
gain
constructor()
-10-
AnalyserNode
fftSize
frequencyBinCount
maxDecibels
minDecibels
smoothingTimeConstant
constructor()
getByteFrequencyData()
getByteTimeDomainData()
getFloatFrequencyData()
getFloatTimeDomainData()
-17-
PannerNode
coneInnerAngle
coneOuterAngle
coneOuterGain
distanceModel
maxDistance
orientationX
orientationY
orientationZ
panningModel
positionX
positionY
positionZ
refDistance
rolloffFactor
constructor()
setOrientation()
setPosition()
-12-
AudioListener
forwardX
forwardY
forwardZ
positionX
positionY
positionZ
upX
upY
upZ
constructor()
setOrientation()
setPosition()
-2-
StereoPannerNode
pan
constructor()
-2-
DelayNode
delayTime
constructor()
-2-
ConstantSourceNode
offset
constructor()
-3-
ConvolverNode
buffer
normalize
constructor()
-5-
OscillatorNode
detune
frequency
type
constructor()
setPeriodicWave()
AudioSchedulerSourceNode
-6-
AudioBufferSourceNode
buffer
detune
loop
loopEnd
loopStart
playbackRate
constructor()
start()
-4-
AudioScheduledSourceNode
onended
constructor()
start()
stop()
-1-
ChannelSplitterNode
constructor()
-1-
ChannelMergerNode
constructor()
-7-
BiquadFilterNode
detune
frequency
gain
Q
type
constructor()
getFrequencyResponse()